

# Pro Fit<sup>®</sup>

## Roofing and Siding



CAN-AMERICAN CORRUGATING CO. LTD.

Margaret, MB

Tel: 1-204-776-2081

Fax: 1-204-776-2238

Toll Free: 1-866-776-2081

[www.canamerican.ca](http://www.canamerican.ca)

# Pro Fit®... tackles tough weather and does it handsomely

Pro Fit® roofing and siding is engineered to stay bright, tight and durable for years to come. With crisp chalk-free colors, an appealing profile and rugged no-nonsense construction, Pro Fit® is a cost-efficient contemporary building material perfect for a wide variety of agricultural, light industrial, commercial, and residential applications.

The key to the durability of Pro Fit® is full hard, 100,000+ psi high tensile strength galvanized steel. Our exclusive computer-aided profile design incorporates a no-leak drain channel and adds rigidity and strength, assuring tight side laps and a dry, snug interior even under the most adverse weather conditions and years of hard use.

## Pro Fit® Uses WeatherX Coatings Technology

WeatherX coatings are renowned for their gloss retention, color robustness, and superior chalking resistance. WeatherX technology merges durable ceramic and other select inorganic pigments with the strength of Valspar's proprietary silicone polyester resin to fight the detrimental effects of the sun's ultraviolet rays, rain, humidity, and weathering. Furthermore, this paint system provides superior abrasion resistance to minimize cracking or marring from fabrication, transit, and construction. SR WeatherX color formulas meet or exceed the minimum requirements for an Energy Star® rating.

C  
O  
L  
O  
R  
S



CA White 



CA Red 



Rawhide 



Barn Red 



Earth Brown 



Slate Blue 



Bone White 



Evergreen 



Sandstone 



Bright White 



Clay 



Pebble Beige 



Ash Gray 



Pewter Gray 



Vintage Burgundy 



CA Blue



Antique Brown



Quaker Gray



Forest Green



Dark Blue



Black




Tile Red 

Also available in Galvanized and Galvalume.

Note: Due to the limitations of the printing process, the colors shown above may be slightly different from the actual metal panels. For critical color matches, please ask your account representative for painted metal samples.

P  
R  
O  
F  
I  
L  
E

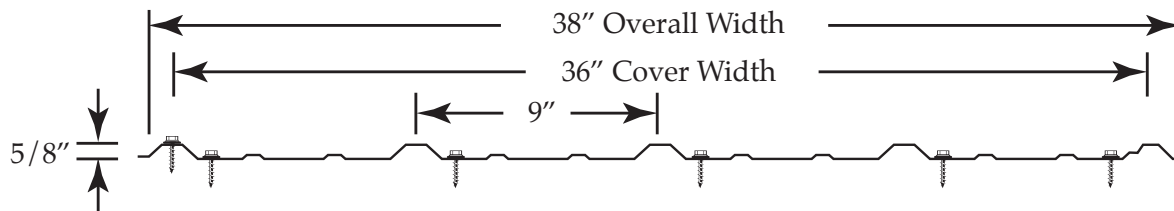

Q  
U  
I  
C  
K  
S  
P  
E  
C  
S


- Full-hard 100,000+ psi high tensile galvanized steel
- Popular 38" width (36" coverage) in lengths from 1 through 45 feet in even one inch increments
- Available in Galvanized G-90, Galvalume and twenty-two rich baked-on colors.
- 28 gauge (26 gauge on special order)
- 40 Year Limited Warranty

Allowable Distributed Loads (lbs/sq ft)						
Span Load	2' 0"	2' 6"	3' 0"	3' 6"	4' 0"	5' 0"
	73	69	40	25	17	8

Notes:

1. Minimum yield stress is to be no less than 80,000 psi.
2. Based on 3 or more continuous spans.
3. Above loads are based on L/180 deflection criteria.
4. Minimum bearing length of no less than 1.5 inches was assumed for all calculations.

L  
A  
P  
D  
E  
T  
A  
I  
L

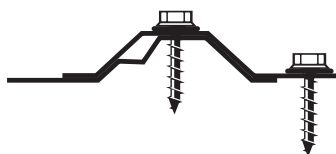

LAP DETAIL

(stitch screws at installer's discretion)



## CAN-AMERICAN CORRUGATING CO. LTD.

www.canamerican.ca Margaret, MB



Tel: 1-204-776-2081

Fax: 1-204-776-2238

Toll Free: 1-866-776-2081